

Floors and Walls

for you.



Floors and Walls Designed for Everyday Living

TrendCollection offers innovative floor and wall covering solutions created to support modern lifestyles and simplify everyday use. Designed with performance and practicality in mind, our products combine durability, comfort, and ease of installation.

The collection includes traditional cork, digitally printed designs, vinyl, and rigid polymer solutions. Each option is engineered to resist wear, scratches, stains, and moisture, ensuring long-lasting beauty with minimal maintenance.

Suitable for both residential and commercial environments, such as hotels, offices, retail spaces, restaurants or schools, TrendCollection adapts effortlessly to a wide range of applications.

Our floors provide natural comfort, acoustic insulation, and structural stability, contributing to welcoming and functional spaces. Complementing them, our eco-conscious wall coverings offer a diverse selection of colours, finishes, and textures, empowering designers to create distinctive and cohesive interiors.

With TrendCollection, achieving healthy, durable, functional, and visually consistent spaces is simple. These are reliable solutions designed to perform over time, delivering quality and confidence you can trust.



Solid, Stylish and Enduring

SOLIDTREND



Sea Sand Herringbone
■ 238 605 02



Soho Grey Herringbone
■ 238 605 03



Barnwood Herringbone
■ 238 605 07



Timberland Herringbone
■ 238 605 09



Everest
■ 038 505 01



Loft
■ 038 505 05



Montana
■ 038 505 08



Timberland
■ 038 505 09



Sea sand
■ 038 505 02



Sheridan
■ 038 505 06



Barnwood
■ 038 505 07



Classic
■ 038 505 10



Silver moon
■ 038 505 04



Soho grey
■ 038 505 03



Concrete graphite
■ 138 505 12



Concrete grey
■ 138 505 11

SRC
CORE

Solid Polymer Core

0.55

0,55 mm Wear layer

Waterproof core

High Scratch and Abrasion Resistance

Stable to light and temperature

Impact and Indentation Resistant

Suitable for underfloor Heating

No Telegraphing

Acoustic Cork Underlay

Easy and Fast angle/drop-lock instalation

Easy to clean and maintain

Very low indoor air emissions

ORTHOPHTHALATE
FREE

Orthophthalate-Free

Reusable



13-0915
Reed Yellow

residential
warranty
20
years

commercial
warranty
10
years

1220

181

5,0

038 WOOD

610

305

5,0

138 STONE

635

127

5,0

238 HERRINGBONE

1 DURAMOND® hard-wearing super matt finish

2 0,55 mm wear layer with embossing

3 Authentic look printed decorative film

4 Waterproof Solid Rigid Core polymer

5 i4F angle/drop-lock system for fast installation

6 Integrated cork underlay for thermal/ sound insulation





Reliable, Resilient and Refined

VINYL TREND



Hacienda
■ 033 081 07 / 004 281 07



Tavern
■ 033 014 01 / 004 214 01



Midwest
■ 033 019 13 / 033 019 13



Mountain
■ 033 031 12 / 004 231 12



Pearl
■ 033 000 05 / 004 200 05



Alpine
■ 033 070 22 / 004 270 22



Barn
■ 033 081 17 / 004 281 17



Chester
■ 033 033 10 / 004 233 10



Cornfield
■ 033 002 32 / 004 202 32



Helios
■ 033 031 50 / 004 231 50



Navajo
■ 033 031 51 / 004 231 51



Dune
■ 033 019 05 / 004 219 05



Sunset
■ 033 070 01 / 004 270 01



Sahara
■ 033 070 03 / 004 270 03



Cottage
■ 033 013 51 / 004 213 51



Harvest
■ 033 033 71 / 004 233 71



Fawn
■ 033 019 06 / 004 219 06



Newport
■ 033 013 81 / 004 213 81



Saddle
■ 033 033 11 / 004 233 11



Autumn
■ 033 033 25 / 004 233 25



Polar
■ 033 013 31 / 004 213 31



Newance
■ 033 074 07 / 004 274 07



Castle
■ 033 031 30 / 004 231 30



Artisan
■ 033 054 61 / 004 254 61



Iceland
■ 033 081 33 / 004 281 33



Spike
■ 033 032 71 / 004 232 71



Dove
■ 033 031 52 / 004 231 52



Graphite
■ 033 081 14 / 004 281 14




Harbor
■ 033 032 61 / 004 232 61



Galleon
■ 033 017 41 / 004 217 41



Lakeside
■ 033 033 02 / 004 233 02



Concrete Light
■ 234 066 02 / 004 266 02



Concrete Warm
■ 234 066 03 / 004 266 03



Concrete Dark
■ 234 066 04 / 004 266 04



LVT on HDF core



Impact and Indentation Resistant



Suitable for underfloor Heating



Acoustic Cork Underlay



Easy to clean and maintain



Orthophthalate-Free



0,33 mm Wear layer



High Scratch and Abrasion Resistance



No Telegraphing



Fast Click Installation




Very low indoor air emissions



Reusable





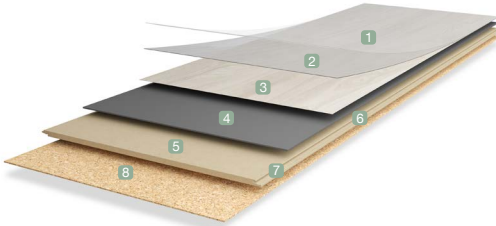




033 WOOD



234 STONE

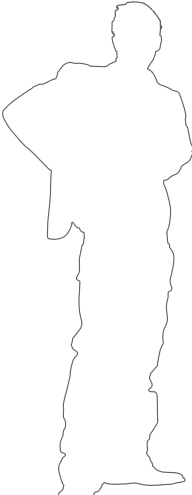

194

1164

9,5

300

1164

9,5

1 DURAMOND® hard-wearing super matt finish

2 0.33 mm MICROCERAMIC wear layer with embossing

3 Authentic look printed decorative film

4 Vinyl core layer

5 Swell-resistant HDF core board

6 Click system for fast installation

7 All around JointShield® edge sealing


8 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection





Ecological, Strong and Timeless

KENKOTREND

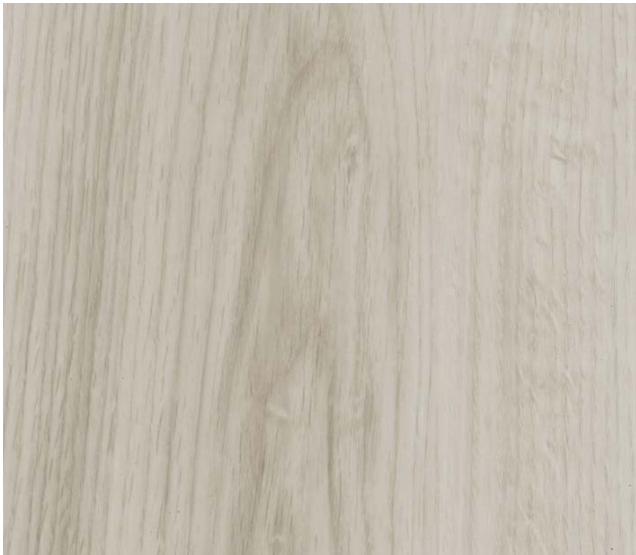

Ivory
■ 129 024 08



Ashland
■ 129 024 09



Satin
■ 129 008 39



Amber
■ 129 023 54



Saddle
■ 129 004 96



Chestnut
■ 129 008 40



Authentic look and feel



Comfortable



High Scratch and Abrasion Resistance



Suitable for underfloor heating



Impact and step noise reduction



Easy to clean and maintain



Extra-wide plank



PVC-free and phthalates-free



Warm



Impact and Indentation Resistant



No Telegraphing



Fast click installation




Very low indoor air emissions



Reusable and Recyclable



18-0940
Golden Brown

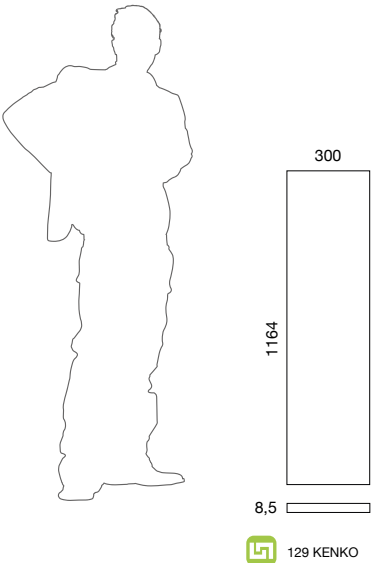


residential
warranty
10
years

commercial
warranty
5
years



- 1 High abrasion-resistant Electron-beam hardening technology finish
- 2 High quality, authentic look, polypropylene decor surface
- 3 Natural cork composite
- 4 Swell-resistant HDF core board
- 5 Click system for fast installation
- 6 All around JointShield® edge sealing
- 7 CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection



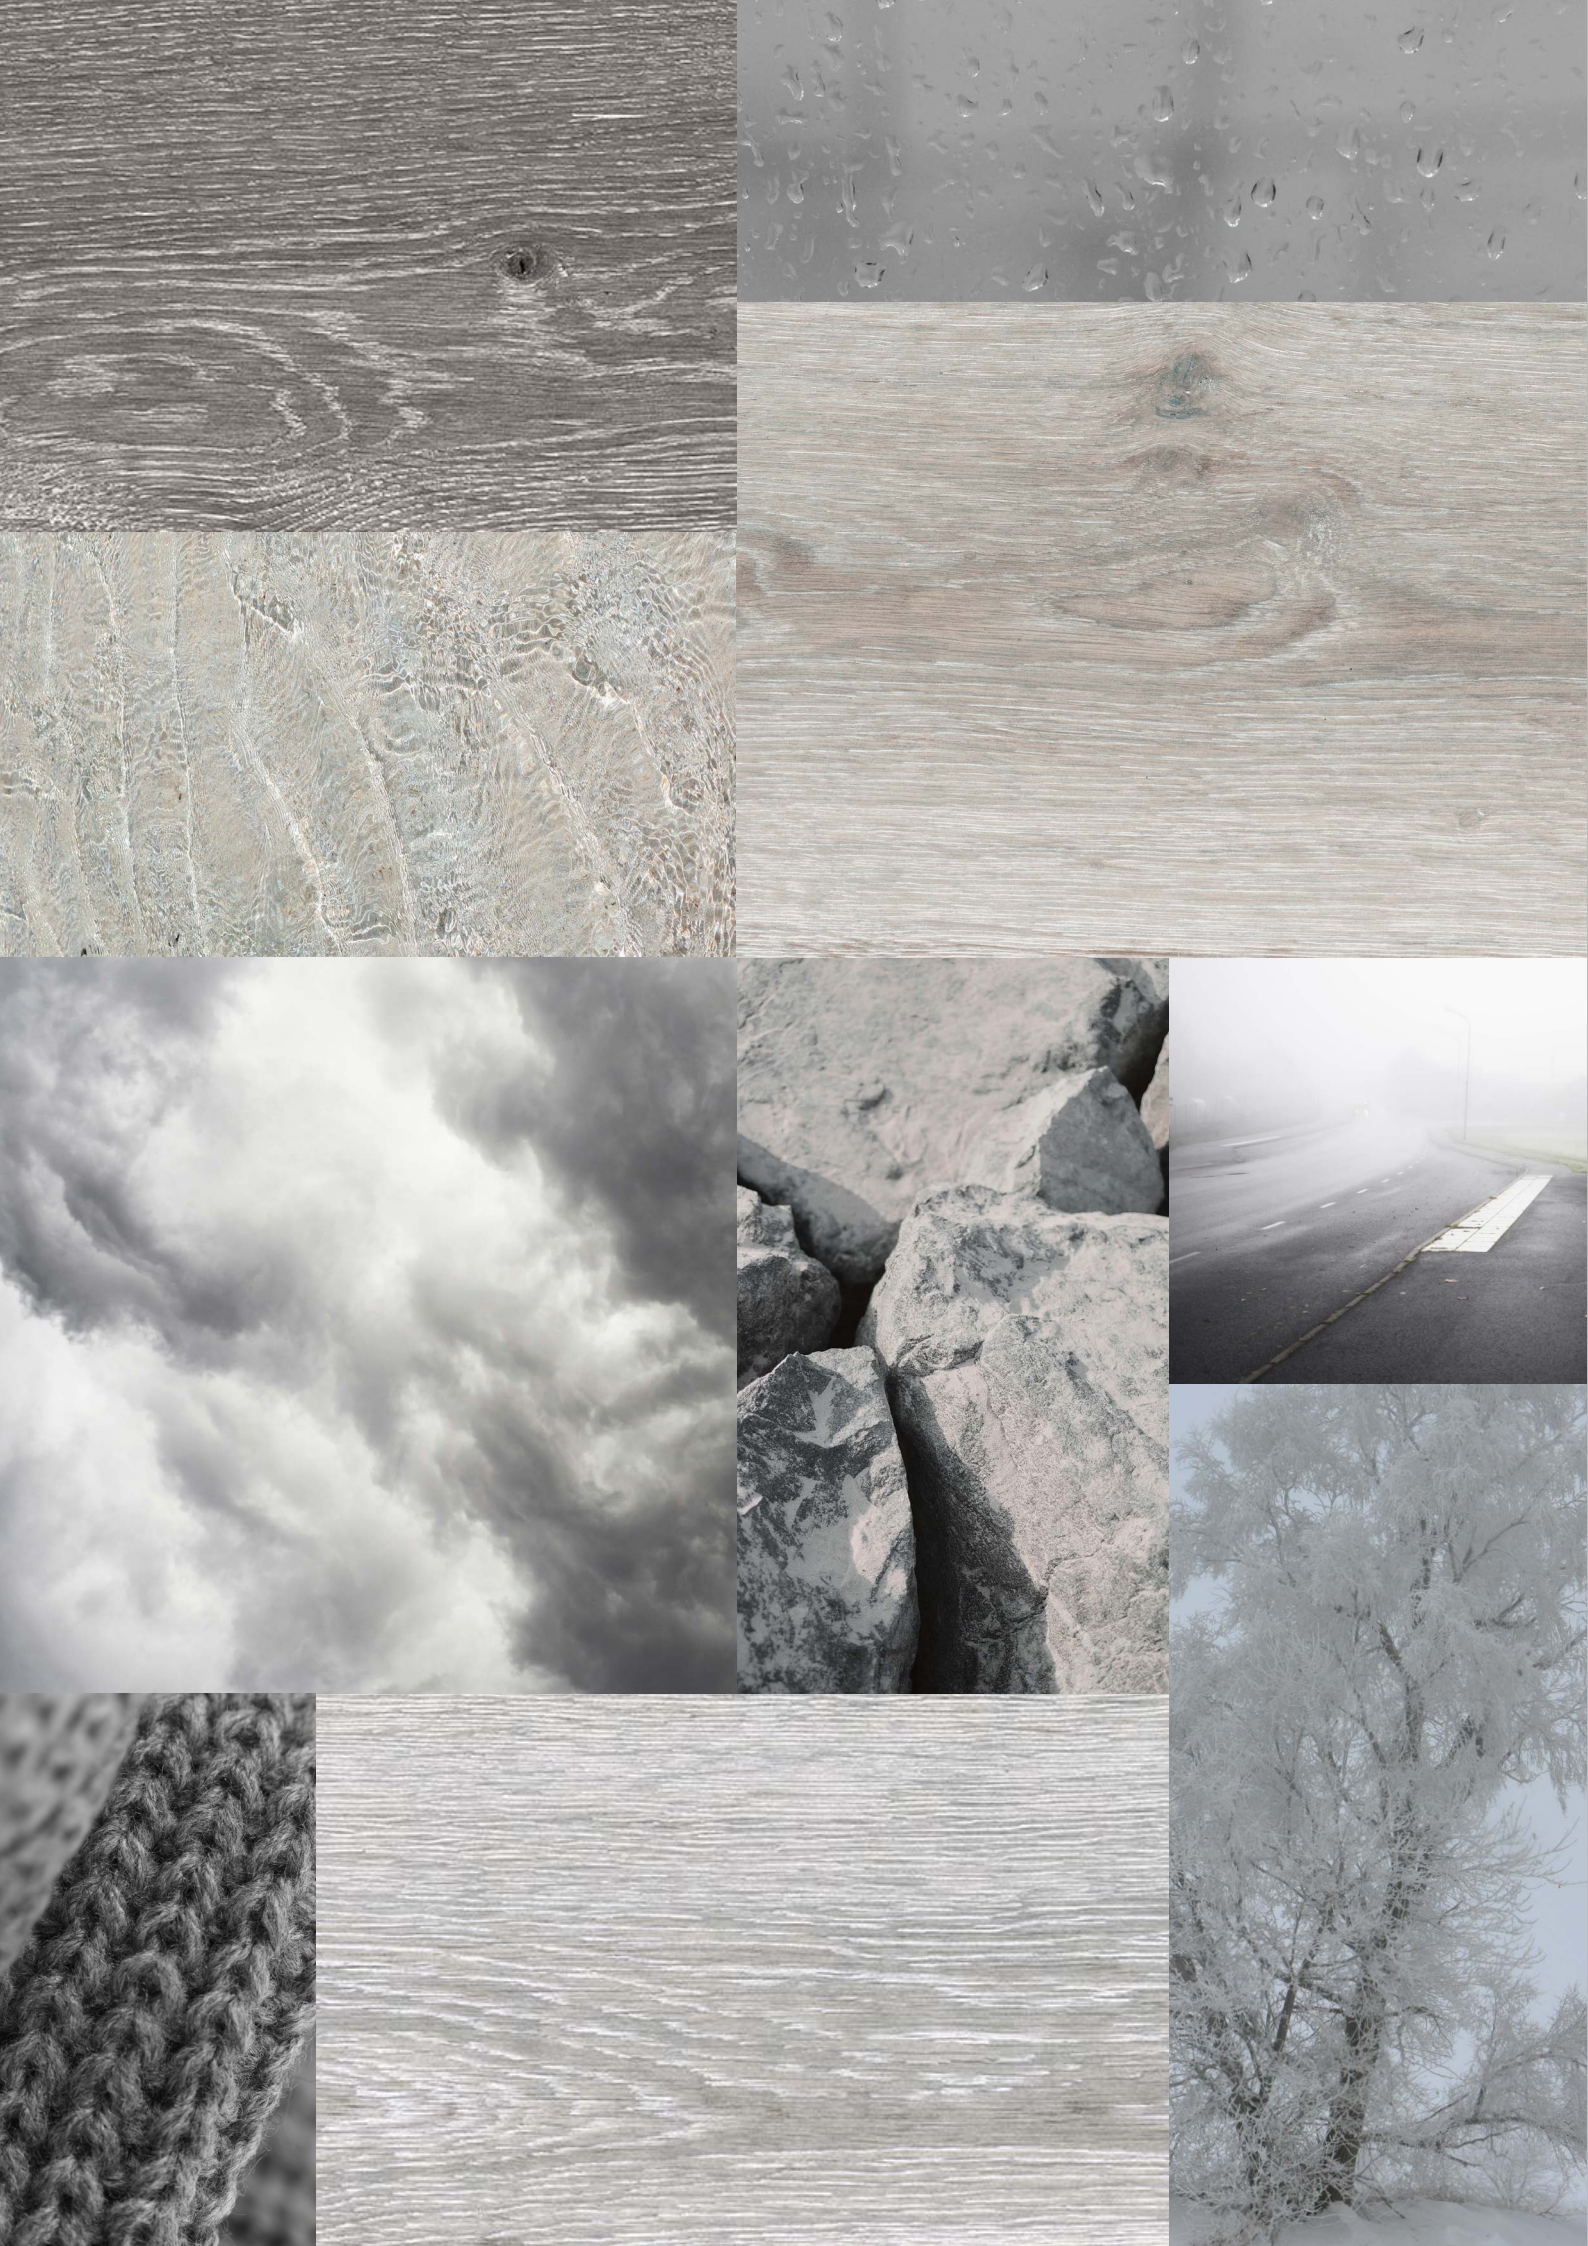

Sustainable, Stylish and Natural



Pearl
■ 492 001 05 / 490 001 05



Blanc
■ 492 001 06 / 490 001 06



Seashell
■ 492 001 13 / 490 001 13



Vanilla
■ 492 001 17 / 490 001 17



Snow
■ 492 001 15 / 490 001 15



Greystone
■ 492 001 10 / 490 001 10



Oasis
■ 492 001 12 / 490 001 12



Moccasin
■ 492 001 14 / 490 001 14



Blond
■ 492 001 02 / 490 001 02



Spice
■ 492 002 01 / 490 002 01



Antique
■ 492 001 01 / 490 001 01



Rust
■ 492 001 20 / 490 001 20



Pure
■ 492 001 55 / 490 001 55



Vogue
■ 492 001 53 / 490 001 53



Bisque
■ 492 001 18 / 490 001 18



Tweed
■ 492 001 34 / 490 001 34



Smoke
■ 492 001 16 / 490 001 16



Breeze
■ 492 001 35 / 490 001 35



Concrete Pearl
■ 493 002 70 / 491 002 70



Concrete Cool
■ 493 002 71 / 491 002 71

High definition digital print

Sustainable cork surface

Comfortable

Warm

High Scratch and Abrasion Resistance

Impact and Indentation Resistant

Impact and step noise reduction

No Telegraphing

Suitable for underfloor heating

Fast click installation

Easy to clean and maintain

Very low indoor air emissions

PVC-free and phthalates-free

Reusable and Recyclable



residential warranty

10 years

commercial warranty

5 years

1

WEARTOP® Hard-wearing matt finish

2

Authentic look high-definition digital printing

3

High-density natural cork composite

4

Swell-resistant HDF core board

5

Click system for fast installation

6

All around JointShield® edge sealing

7

CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection

492 ECO

490 PRIME

194

1164

8,5

9,5

300

1164

493 ECO

491 PRIME






Unique, Warm and Pure

NATURTREND

EXCLUSIVE




Strip Cream
■ 212 122 11



Strip Sand
■ 212 122 14



Strip Silver
■ 212 122 48



Strip Stone
■ 212 122 45



Strip Storm
■ 212 122 56



Strip Tan
■ 212 122 38



SMART



Fein
■ 012 214 00



Fein cream
■ 012 214 11




Fein grey
■ 012 214 55



Mystic white
■ 012 440 17



Klassik
■ 012 150 00



Klassik white
■ 012 150 17




Klassik sand
■ 012 150 14




Trace
■ 012 121 00



Marmor
■ 012 910 00



Marmor cream
■ 012 910 11



Castello
■ 012 241 00



Castello terracotta
■ 012 241 60



Element rustic
■ 012 111 00



Element rustic cream
■ 012 111 11



Wild
■ 012 179 00



Wild sand
■ 012 179 14

Sustainable cork surface

Natural texture

Comfortable

Warm

High Scratch and Abrasion Resistance

Impact and Indentation Resistant

Suitable for underfloor heating

No Telegraphing

Impact and step noise reduction

Fast click installation

Easy to clean and maintain

Very low indoor air emissions

PVC-free and phthalates-free

Reusable and Recyclable



11-0105
Antique White

residential
warranty
10
years

commercial
warranty
5
years

WEARTOP® Hard-wearing matt finish

Natural cork decorative veneer

High-density natural cork composite

Swell-resistant HDF core board

Click system for fast installation

All around JointShield® edge sealing

CleanCork underlay for thermal and sound insulation, with Microban® antimicrobial protection

012 SMART

212 EXCLUSIVE



NATURTREND
Klassik Sand



NATURTREND
Klassik White



Earthy, Versatile and Distinct

WALLTREND

CLASSIC



Grain
■ 605 020 000



Gem
■ 605 200 000



River
■ 605 131 000



Country
■ 605 241 000



Forest
■ 605 700 000



Mocha
■ 605 100 000



Element Rustic
■ 605 110 000




Element Rustic Black
■ 605 110 090




Twist
■ 605 900 000



Twist Cream
■ 605 900 011



Twist Green
■ 605 900 092



Twist Red
■ 605 900 091

URBAN



Helsinki
■ 606 241 012



Talin
■ 606 241 011




Paris
■ 606 900 627




Toledo
■ 606 040 044




Berlin
■ 606 121 055



Venice
■ 606 040 620



Amsterdam
■ 606 241 625



Lisbon
■ 606 900 626

CLASSIC



Country White
■ 605 241 081




Country Blue
■ 605 241 087



Country Pearl
■ 605 241 074




Country Greige
■ 605 241 714




Country Red
■ 605 241 089



Country Black
■ 605 241 090



Country Purple
■ 605 241 711



Country Black Terracotta
■ 605 241 707



Primus Rustic White
■ 605 170 081



Primus Rustic Brown
■ 605 170 086



Parallel
■ 605 121 000



Parallel Cream
■ 605 121 011

CORKY



Cloud
■ 607 040 011



Bright
■ 607 040 012



Silver
■ 607 040 055



Shadow
■ 607 040 042

RUSTIC



Virgin
■ 610 070 000



Belly
■ 610 071 000



Amadia
■ 610 074 000

WALLTREND



Natural cork texture



Comfortable



Noise reduction



Easy to clean and maintain



Formaldehyde-free,
PVC-free and phthalates-free



100% Sustainable cork



Warm




Easy glued installation





Very low indoor air emissions




Recyclable

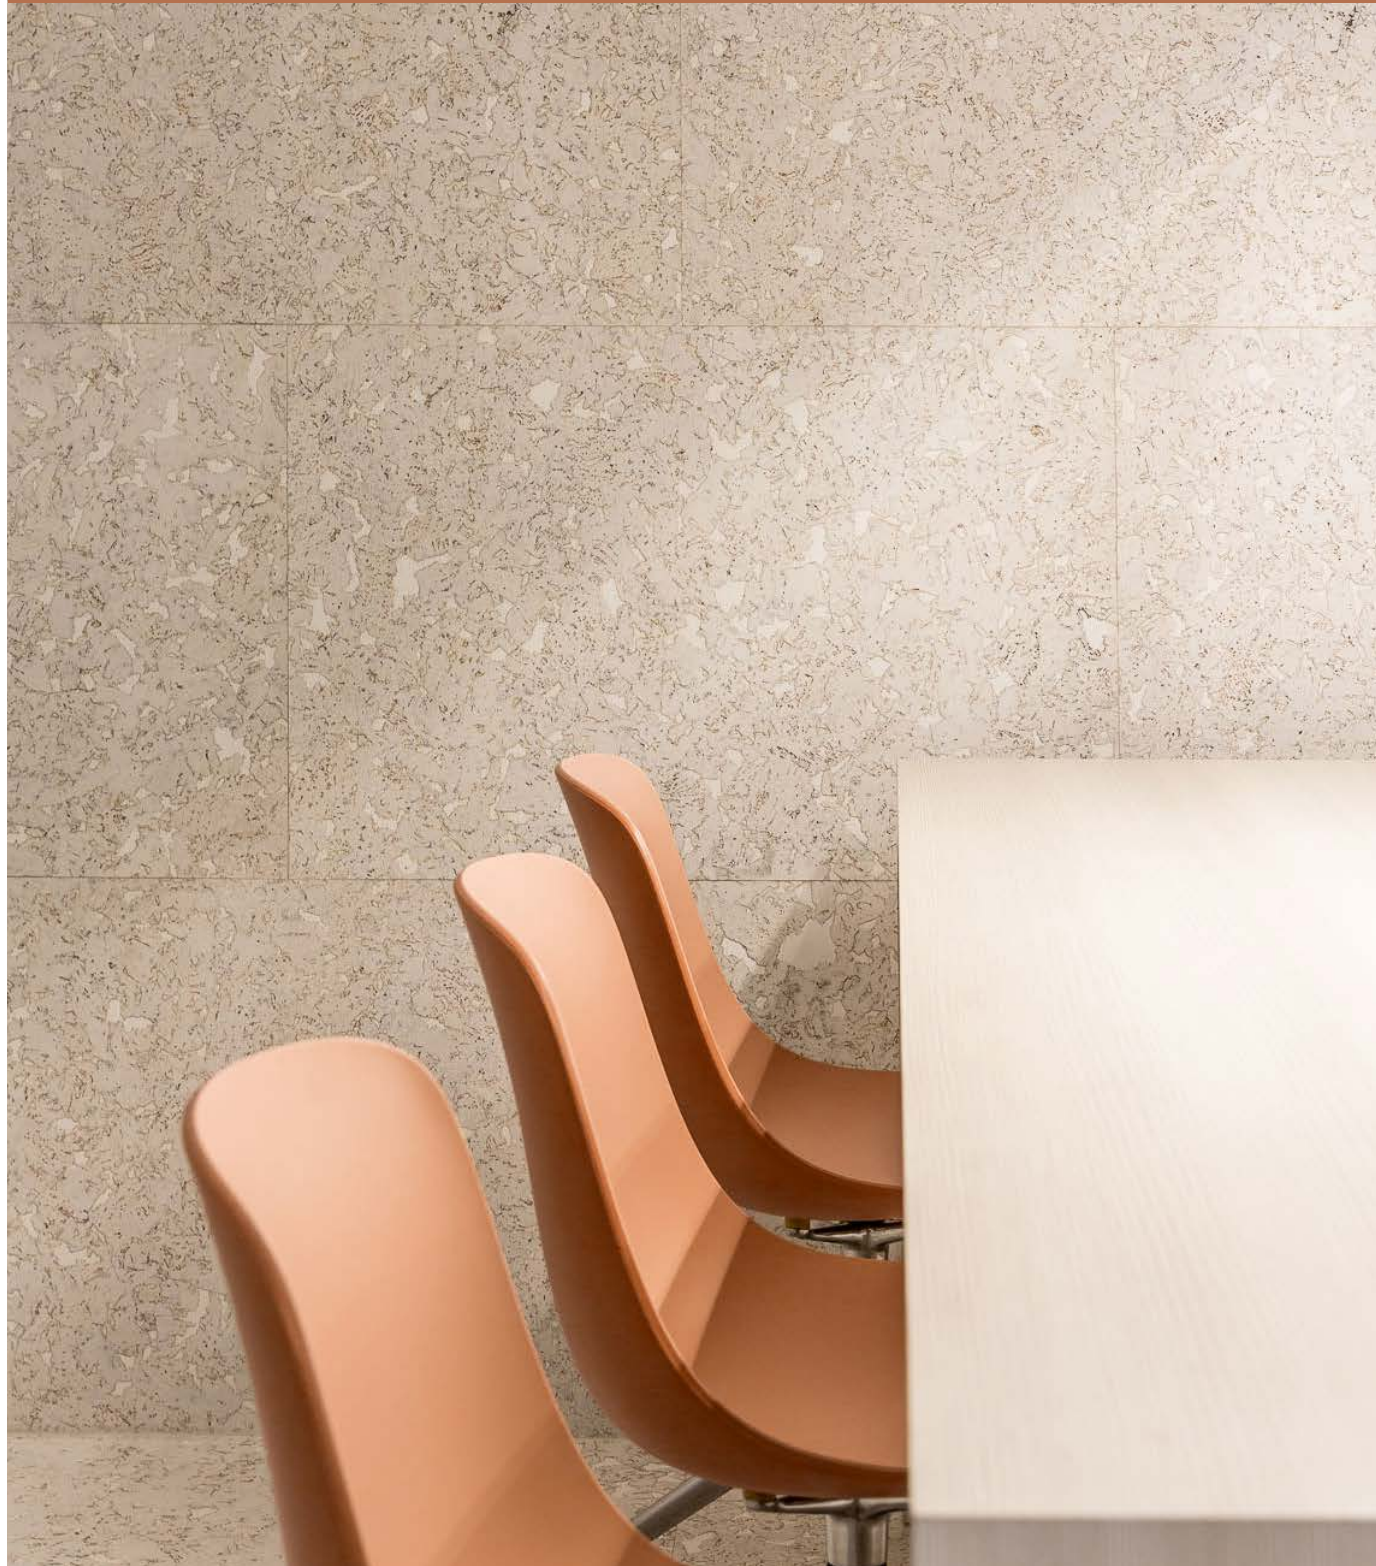


17-1347
Autumn Leaf

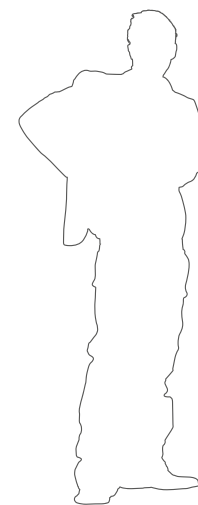


3,0
605 CLASSIC



4,0
606 URBAN
607 CORKY



30
610 RUSTIC

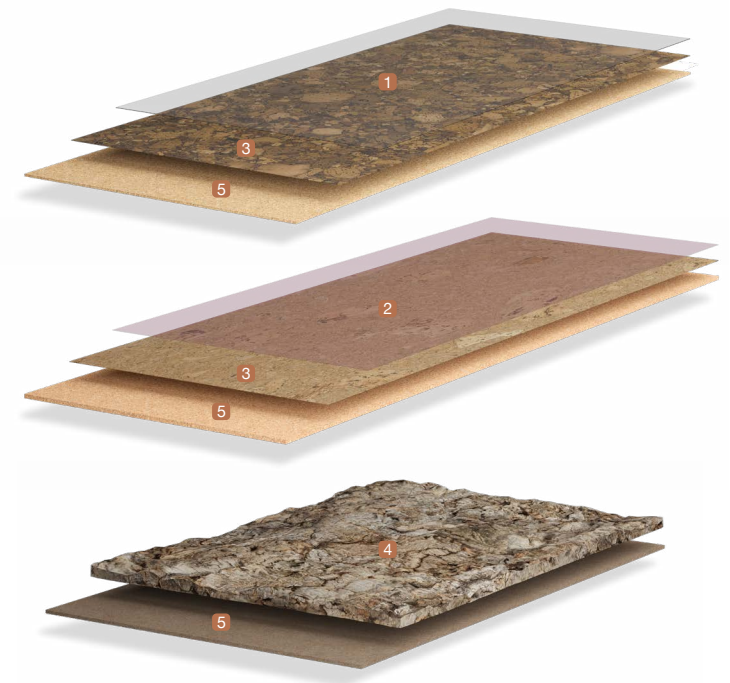

- 1 Wax matt finish
- 2 CORKGUARD® waterbased coloured protection finish
- 3 Natural cork decorative veneer
- 4 Rough cork bark and natural cork
- 5 Agglomerated cork



TECHNICAL DATA

			<i>SOLIDTrend</i>	<i>VINYLTrend</i>	<i>KENKOTrend</i>	<i>DESIGNTrend</i>	<i>NATURTrend</i>
General Properties	Standard	Unit					
Level of use Residential/Commercial	EN ISO 16511	Class	23 / 34	23 /32	23 / 34	ECO 23 / 31 PRIME 23 / 32	23 / 31
Dimensions	EN ISO 24342	mm	(WD) 1220 x 181 ±0,1% (ST) 610 x 305 ±0,1% (HB) 635 x 127 ±0,1%	(WD) 1164 x 194 ±0,1% (ST) 1164 x 300 ±0,1%	1164x300 ±0,1%	(WD) 1164 x 194 ±0,1% (ST) 1164 x 300 ±0,1%	(SMART) 910 x 300 ±0,1% (EXCLUSIVE) 1164 x 300 ±0,1%
Thickness	EN ISO 24346	mm	5 ±0,2	9,5 ±0,2	8,5 ±0,2	ECO 8,5 ±0,2 PRIME 9,5 ±0,2	9,5 ±0,2
Squareness	EN ISO 24342	mm	< 0,3	< 0,3	< 0,2	< 0,3	< 0,3
Straightness	EN ISO 24342	mm	< 0,2	< 0,3	< 0,3	< 0,3	< 0,3
Mass per unit area	EN ISO 23997	g/m²	7700 ±10%	9100 ±10%	6700 ±10%	ECO 6800 ±10% PRIME 7400 ±10%	7300 ±10%
Flatness of the panel Length concave/convex Width concave/convex	EN 16511	%	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	< 0,2 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2	< 0,1 / 0,5 < 0,1 / 0,2
Opening between panels	EN 16511	mm	< 0,1	< 0,1	< 0,1	< 0,1	< 0,1
Height difference between panels	EN 16511	mm	< 0,1	< 0,15	< 0,15	< 0,15	< 0,15
Locking strength Long / Short	EN ISO 24334	kN/m	>2 / >3,5	>3 / >4	>3 / >4	>3 / >4	>3 / >4
Thickness swelling	EN ISO 24336	%	< 0,8	< 16	< 16	< 16	< 16
Dimensional variation caused by changes in atmospheric humidity	ISO 24339	%	< 0,15	< 0,25	< 0,25	< 0,25	< 0,25
Effect of a furniture leg	EN ISO 16581		No visible damages	No visible damages	No visible damages	No visible damages	No visible damages
Effect of a castor chair	EN ISO 4918		No visible damages	No visible damages	No visible damages	No visible damages	No visible damages
Residual indentation	EN ISO 24343-1	mm	< 0,1	< 0,25	< 0,15	< 0,25	< 0,25
Wear resistance	EN 15468	Class	> 7000	> 5000	> 7000	> 5000	> 5000
Safety Properties	Standard	Unit					
Reaction to fire	EN 13501-1	Class	Bfl-s1	Bfl-s1	Dfl-s1	Cfl-s1	Cfl-s1
Formaldehyde emission	EN 717-2	Class mg/Kg	E1	E1	E1	E1	E1
PCP content	CEN/TR 14823	ppm	< LOQ	< LOQ	< LOQ	< LOQ	< LOQ
Slip resistance	EN 14041	Class	DS	DS	DS	DS	DS
Sliding coefficient	EN 13893 / DIN 51130	Coeff.	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11	> 0,35 / R11
Additional Properties	Standard	Unit					
Thermal resistance	EN 12667	m².K/W	0,032	0,068	0,082	ECO 0,068 PRIME 0,074	0,084
Thermal conductivity	EN 12667	W/m.K	0,159	0,140	0,104	0,126	0,113
Impact noise reduction ΔLw	EN ISO 10140-3	dB	17	16	17	17	17
Light fastness	EN ISO 105-B02	blue scale	6	6	6	6	5
Micro-scratch resistance	EN 16094	Class	MSR-A2 / MSR-B1	MSR-A2 / MSR-B1	MSR-A2 / MSR-B2	MSR-A1	MSR-A1
Impact resistance (big ball)	EN 13329	mm	> 1800	> 1800	> 1800	> 1600	> 1600
Other Features							
Installation system			i4F 3L TripleLock	Click	Click	Click	Click
Surface Finish			DURAMOND®	DURAMOND®	EB-COATING	WEARTOP®	WEARTOP® WEARPLUS®
Wear Layer			0,55 mm	0,33 mm			
FSC® certification				Available on request	Available on request	Available on request	Available on request
VOC Emissions Certifications			AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold
Antibacterial protection				CleanCork Powered by Microban®	CleanCork Powered by Microban®	CleanCork Powered by Microban®	CleanCork Powered by Microban®
Wear through Warranty		Years	20 Residential 10 Commercial	20 Residential 10 Commercial	10 Residential 5 Commercial	10 Residential 5 Commercial	10 Residential 5 Commercial
m² (units) per carton		m² (un)	(WD) 1220 x181: 12 / carton = 2,65 m² (ST) 610x305: 14 / carton = 2,60 m² (HB) 635 x127: 16 / carton = 1,29 m²	(WD) 1164x194: 8/carton = 1,81 m² (ST) 1164x300: 7/carton = 2,44 m²	8/carton = 2,79 m²	ECO (WD) 1164x194: 9 / carton = 2,03 m² ECO (ST) 1164x300: 8 / carton = 2,79 m² PRIME (WD) 1164x194: 8 / carton = 1,81 m² PRIME (ST) 1164x300: 7 / carton = 2,44 m²	(SMART) 910x300: 8 / carton = 2,184 m² (EXCLUSIVE) 1164x300: 7 / carton = 2,44 m²
m² (cartons) per pallet		m² (un)	(WD) 1220 x181: 52 / pal = 137,8 m² (ST) 610x305: 60 / pal = 156 m² (HB) 635 x127: 98 / pal = 126,5 m²	(WD) 1164x194: 56/pal = 101,4 m² (ST)1164x300: 45/pal = 109,8 m²	45/pal = 125,7 m²	ECO (WD) 1164x194: 56 / pal = 113,8 m² ECO (ST) 1164x300: 45 / pal = 125,7 m² PRIME (WD) 1164x194: 56 / pal = 101,4 m² PRIME (ST) 1164x300: 45 / pal = 109,8 m²	(SMART) 910x300: 56 / pal = 122,3 m² (EXCLUSIVE) 1164x300: 45 / pal = 109,8 m²
Weight of cartons		Kg	(WD) (ST) 20 Kg (HB) 10 Kg	(WD) 17 Kg (ST) 22 Kg	19 Kg	(WD) 14 Kg (ST) 18 Kg	16 Kg / 18 Kg

			<i>WALLTrend</i>		
General Properties	Standard	Unit	CLASSIC	URBAN / CORKY	RUSTIC
Dimensions	EN ISO 24342	mm	600x300±0,5%	600x300 ± 0,5%	600x300
Thickness	EN ISO 24346	mm	3 ±0,2	4 ± 0,2	25 to 35
Squareness	EN ISO 24342	mm	< 0,4	< 0,4	< 0,4
Straightness	EN ISO 24342	mm	< 0,3	< 0,3	< 1
Apparent density	ISO 7322	Kg/m³	290	300	
Mass per unit area	EN ISO 23997	g/m²	870 ±10%	1200 ±10%	5000 to 7500
Compression	ISO 7322	%	≤ 40	≤ 40	
Recuperation	ISO 7322	%	≥ 75	≥ 75	
Dimensional stability	EN ISO 23999	%	< 0,4	< 0,4	< 1
Moisture Content	EN 12105	%	≤ 8	≤ 8	≤ 10
Curling	EN ISO 23999	mm	< 6	< 6	
Tensile strength	ISO 7322	kPa	≥ 700	≥ 700	
Safety Properties	Standard	Unit			
Reaction to fire	EN 13501-1	Class	E	E	E
Formaldehyde emission	EN 717-2	mg/Kg	Pass	Pass	Pass
Vinyl chloride monomer (VCM)	EN 12149	mg/Kg	Pass	Pass	Pass
Release of heavy metals and specific elements	EN 12149	mg/Kg	Pass	Pass	Pass
Additional Properties	Standard	Unit			
Thermal resistance	EN 12667	m².K/W	0,06	0,09	0,49
Thermal conductivity	EN 12667	W/m.K	0,05	0,05	0,05
Weighted sound absorption coefficient	EN ISO 354	aw	0,05	0,1	0,25
Other Features					
Installation system			Glue-on	Glue-on	Glue-on
Surface Finish			PARAWAX	CORKGUARD	NATURAL
FSC® certification			Available on request	Available on request	Available on request
VOC Emissions Certifications			AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold	AgBB; A+ Greenguard Gold
m² (units) per carton		m² (un)	3,96 m² (22)	2,88 m² (16)	1,8 m² (10)
m² (cartons) per pallet		m² (un)	594 m² (150)	432 m² (150)	64,8 m² (36)
Weight of cartons		Kg	3,5	3,5	12

Attention

Trendcollection products are made with high quality materials and should be handled accordingly. In spite of all due care given during manufacturing, there will be variations in appearance (colour, gloss, or texture). This should be verified before installation, distributing the tiles/planks in a way that variations are not striking. The surface may change colour when exposed to direct sunlight.

Although every effort has been made to ensure accuracy during the production of this catalogue, GRANORTE disclaims potential product changes and possible print errors. The product photos may not accurately match the real colour and texture of the finished product.

[illegible]

GRANORTE – REVESTIMENTOS DE CORTIÇA, LDA.
Avenida Santiago, 68 | 4520-470 Rio Meão | PORTUGAL
info@granorte.pt | www.granorte.pt

GRANORTE GmbH DEUTSCHLAND
Nimrodstraße 22 | 90441 Nürnberg | GERMANY
info@granorte.de | www.granorte.de

GRANORTE UK LTD
Unit 18 Cedar Court | Halesfield 17 | Telford TF7 4PF | UK
info@granorte.co.uk | www.granorte.co.uk

VANETON SRL A UNICO SOCIO
Via Repubblica di San Marino, 38 | 41122 Modena | ITALY
info@granorte.it | www.granorte.it

SHANGHAI PARQUET CORK IMPORT & EXPORT CO. LTD.
3000 Longdong Avenue, Pudong New District 201203
Shanghai | CHINA

BEIJING PARQUET CORK IMPORT & EXPORT CO. LTD.
Room 106, Building 23 Sanfengli, Chaoyang District 100022
Beijing | CHINA

